




W-BEAM RAIL ELEMENT



6' POST




6"x8"x14" BLOCKOUT

1. ALL DIMENSIONS ARE SUBJECT TO MANUFACTURING TOLERANCES.
2. RAIL ELEMENTS SHALL BE FURNISHED SHOPCURVED, CONCAVE OR CONVEX. FOR RADII BETWEEN 20 FEET AND 150 FEET.
3. THE STEEL FOR RAIL ELEMENTS, POSTS AND MISCELLANEOUS HARDWARE SHALL CONFORM TO THE STANDARD SPECIFICATIONS AND ITS AMENDMENTS.
4. GUIDE RAIL DELINEATORS ARE TO BE MOUNTED TO THE CENTER OF THE RAIL ELEMENT FACE AND ORIENTED TOWARD THE APPROACHING TRAFFIC. REFER TO STANDARD SPECIFICATIONS. SEE GR-9 FOR GUIDE RAIL DELINEATOR DETAILS. DELINEATOR TO BE MOUNTED AT RAIL SPLICE ONLY. MOUNTING AT RAIL POST ASSEMBLY SHALL BE PROHIBITED.
5. GARDEN STATE PARKWAY RAIL ELEMENTS AND POSTS TO BE PRE-STAINED PRIOR TO INSTALLATION TO CREATE A RUSTIC BROWN MATTE FINISH. REFER TO SPECIFICATIONS FOR STAIN TREATMENT.
6. SEE GR-1 FOR BOLT, WASHER AND NUT DETAILS.
6. SEE GR-3 FOR RUB RAIL DETAILS.



MASH TL-3

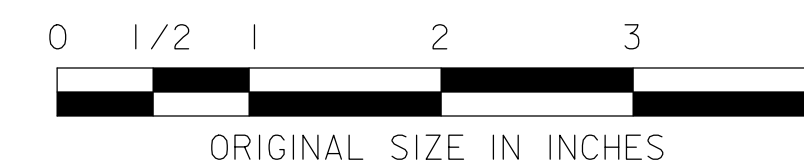

NEW JERSEY TURNPIKE AUTHORITY
**NEW JERSEY TURNPIKE
GARDEN STATE PARKWAY**

STANDARD DRAWINGS

BEAM GUIDE RAIL, DUAL FACED

OFFICE OF THE CHIEF ENGINEER
NEW JERSEY TURNPIKE AUTHORITY
WOODBIDGE, NEW JERSEY

STANDARD DRAWING

GR-2

0	ORIGINAL DRAWING	07/2
REV.	DESCRIPTION	DATE