

[illegible]

PLAN 1 DRAINAGE TABULATION						
STRUCTURE NO.	STA., OFFSET	TOP OF GRATE	TYPE OF STRUCTURE	INVERTS	PIPES	REMARKS
1	146+22, 38.00' R	13.91	A	9.97 (15" W OUT)	15" RCCP (OUT)	
2	146+22, 2.00' R	14.73	A	9.80 (15" E IN) 9.75 (15" W IN) 9.75 (15" N OUT)	15" RCCP (IN) 15" RCCP (IN) 15" RCCP (OUT)	
3	146+22, 2.00' L	14.73	A	9.80 (15" W IN) 9.80 (15" E OUT)	15" RCCP (IN) 15" RCCP (OUT)	
4	146+22, 38.00' L	13.91	A	9.97 (15" E OUT)	15" RCCP (OUT)	
PLAN 2 DRAINAGE TABULATION						
STRUCTURE NO.	STA., OFFSET	TOP OF GRATE	TYPE OF STRUCTURE	INVERTS	PIPES	REMARKS
5	149+22, 38.00' R	12.41	A	8.65 (15" W OUT) 8.25 (15" E IN)	15" RCCP (OUT) 15" RCCP (IN)	
6	149+22, 2.00' R	13.23	A	8.25 (15" W IN) 8.50 (15" S IN) 8.25 (18" N OUT)	15" RCCP (IN) 15" RCCP (IN) 18" RCCP (OUT)	
7	149+22, 2.00' L	13.23	A	8.32 (15" E IN) 8.32 (15" W OUT)	15" RCCP (IN) 15" RCCP (OUT)	
8	149+22, 38.00' L	12.41	A	8.65 (15" E OUT)	15" RCCP (OUT)	
9	152+22, 38.00' R	10.91	A	6.97 (15" W OUT)	15" RCCP (OUT)	
10	152+22, 2.00' R	11.73	B	6.75 (15" E IN) 6.75 (15" W IN) 6.75 (18" S IN) 6.00 (24" N OUT)	15" RCCP (IN) 15" RCCP (IN) 18" RCCP (IN) 24" RCCP (OUT)	
11	152+22, 2.00' L	11.73	A	6.80 (15" W IN) 6.80 (15" E OUT)	15" RCCP (IN) 15" RCCP (OUT)	
12	152+22, 38.00' L	10.91	A	6.97 (15" E OUT)	15" RCCP (OUT)	
13	155+22, 38.00' R	9.41	A	5.47 (15" W OUT)	15" RCCP (OUT)	
14	155+22, 2.00' R	10.23	B	5.26 (15" E IN) 5.26 (15" W IN) 4.60 (24" S IN) 4.10 (30" N OUT)	15" RCCP (IN) 15" RCCP (IN) 24" RCCP (IN) 30" RCCP (OUT)	
15	155+22, 2.00' L	10.23	A	5.30 (15" W IN) 5.30 (15" E OUT)	15" RCCP (IN) 15" RCCP (OUT)	
16	155+22, 38.00' L	9.41	A	5.47 (15" E OUT)	15" RCCP (OUT)	


PLAN 3 DRAINAGE TABULATION							
STRUCTURE NO.	STA.	TOP OF GRATE	TYPE OF STRUCTURE	INVERTS	PIPES	REMARKS	
17	158+22, 38.00' R	7.91	A	3.97 (15" W OUT)	15" RCCP (OUT)		
18	158+22, 2.00' R	8.73	B	3.76 (15" E IN)	15" RCCP (IN)		
				3.76 (15" W IN)	15" RCCP (IN)		
				3.20 (30" S IN)	30" RCCP (IN)		
19	158+22, 2.00' L	8.73	A	3.20 (30" N OUT)	30" RCCP (OUT)		
				3.80 (15" W IN)	15" RCCP (IN)		
				3.80 (15" E OUT)	15" RCCP (OUT)		
20	158+22, 38.00' L	7.91	A	3.97 (15" E OUT)	15" RCCP (OUT)		
21	161+22, 38.00' R	7.02	E	2.83 (18" W OUT)	18" RCCP (OUT)		
22	161+22, 2.00' R	7.34	DBL B1	2.64 (18" E IN)	18" RCCP (IN)	NON-STANDARD STRUCTURE	
				2.64 (18" W IN)	18" RCCP (IN)		
				2.31 (30" S IN)	30" RCCP (IN)		
23	161+22, 2.00' L	7.34	BB	2.06 (36" N OUT)	36" RCCP (OUT)	NON-STANDARD STRUCTURE	
				2.67 (18" W IN)	18" RCCP (IN)		
				2.67 (18" E OUT)	18" RCCP (OUT)		
24	161+22, 38.00' L	7.02	E	2.83 (18" E OUT)	18" RCCP (OUT)		
25	163+33, 38.00' R	7.78	A	4.93 (15" W OUT)	15" RCCP (OUT)		
26	163+33, 2.00' R	8.60	B1	4.80 (15" E IN)	15" RCCP (IN)		
				4.77 (15" W IN)	15" RCCP (IN)		
				1.43 (36" S IN)	36" RCCP (IN)		
27	163+33, 2.00' L	8.60	A	1.43 (36" N OUT)	36" RCCP (OUT)		
				4.80 (15" W IN)	15" RCCP (IN)		
				4.80 (15" E OUT)	15" RCCP (OUT)		
28	163+33, 38.00' L	7.78	A	4.93 (15" E OUT)	15" RCCP (OUT)		
29	165+43, 38.00' R	9.24	A	5.30 (15" W OUT)	15" RCCP (OUT)		
30	165+43, 2.00' R	10.06	B1	5.10 (15" E IN)	15" RCCP (IN)		
				5.10 (15" W IN)	15" RCCP (IN)		
				0.80 (36" S IN)	36" RCCP (IN)		
31	165+43, 2.00' L	10.06	A	0.80 (36" N OUT)	36" RCCP (OUT)		
				5.13 (15" W IN)	15" RCCP (IN)		
				5.13 (15" E OUT)	15" RCCP (OUT)		
32	165+43, 38.00' L	9.24	A	5.30 (15" E OUT)	15" RCCP (OUT)		

	BY	DATE
MADE	XXX	XX-XX-XX
TRACED	XXX	XX-XX-XX
CHECKED	XXX	XX-XX-XX
SUPERVISED	X.XXXX	

PLAN 4 DRAINAGE TABULATION						
STRUCTURE NO.	STA., OFFSET	TOP OF GRATE	TYPE OF STRUCTURE	INVERTS	PIPES	REMARKS
33	168+46, 0'	SEE DETAILS FOR RIMS	WATER QUALITY CHAMBER No.1	-0.13(36" S IN) -0.13 (36" W OUT)	36" RCCP (IN) 36" RCCP (OUT)	NON-STANDARD STRUCTURE
34	169+07, 0'	SEE DETAILS FOR RIMS	WATER QUALITY CHAMBER No.2	-0.05 (30" N IN) -0.05 (30" W OUT)	30" RCCP (IN) 30" RCCP (OUT)	NON-STANDARD STRUCTURE
35	169+58, 38.00' R	9.40	A	5.95 (15" W OUT) 5.65 (15" E IN)	15" RCCP (OUT) 15" RCCP (IN)	
36	169+58, 2.00' R	10.22	B	5.55 (15" W IN) 0.14 (30" N IN) 0.14 (30" S OUT)	15" RCCP (IN) 30" RCCP (IN) 30" RCCP (OUT)	
37	169+58, 2.00' L	10.22	A	5.70 (15" W IN) 5.70 (15" E OUT)	15" RCCP (IN) 15" RCCP (OUT)	
38	169+58, 38.00' L	9.40	A	5.95 (15" E OUT)	15" RCCP (OUT)	
39	171+55, 44.52' R	8.10	A	4.95 (15" W OUT)	15" RCCP (OUT)	
40	171+55, 2.00' R	9.01	B	4.80 (15" W IN) 4.65 (15" E IN) 0.83 (30" N IN) 0.83 (30" S OUT)	15" RCCP (IN) 15" RCCP (IN) 30" RCCP (IN) 30" RCCP (OUT)	
41	171+55, 2.00' L	9.01	A	4.85 (15" W IN) 4.85 (15" E OUT)	15" RCCP (IN) 15" RCCP (OUT)	
42	171+55, 38.00' L	8.19	A	5.04 (15" E OUT)	15" RCCP (OUT)	
43	174+55, 51.46' R	6.34	E	2.65 (18" E OUT)	18" RCCP (OUT)	
44	174+55, 2.00' R	7.34	BB	2.40 (18" E IN) 2.40 (18" W IN) 2.63 (21" N IN) 1.88 (30" S OUT)	18" RCCP (IN) 18" RCCP (IN) 21" RCCP (IN) 30" RCCP (OUT)	NON-STANDARD STRUCTURE
45	174+55, 2.00' L	7.34	BB	2.50 (18" W IN) 2.50 (18" E OUT)	18" RCCP (IN) 18" RCCP (OUT)	NON-STANDARD STRUCTURE
46	174+55, 38.00' L	6.52	E	2.80 (18" E OUT)	18" RCCP (OUT)	

GENERAL NOTES:

1. REFER TO CONTRACT DETAILS FOR SPECIFICS ON ALL NON-STANDARD DRAINAGE STRUCTURES (NOTED IN TABLE).
2. STATION DESIGNATIONS ARE TO CENTER OF STRUCTURES AND OFFSET DIMENSIONS ARE TO FACE OF CURB/PARAPET, OTHERWISE TO CENTER OF STRUCTURE.

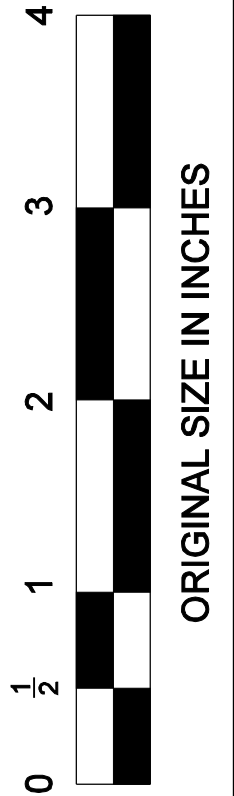

NEW JERSEY TURNPIKE AUTHORITY		19	
ROADWAY NAME		69	
PROJECT DESCRIPTION		SCALE: NONE	
CONTRACT NO.		DATE: MAY 2008	
DRAINAGE TABULATION SHEET -1-		NAME OF CONSULTANT	
		ADDRESS	
		CERTIFICATE OF AUTHORIZATION NO. XXXXXXXXXX	
		JOHN DOE	
		NEW JERSEY PROFESSIONAL ENGINEER LICENSE NO. XXXXXXXXXX	