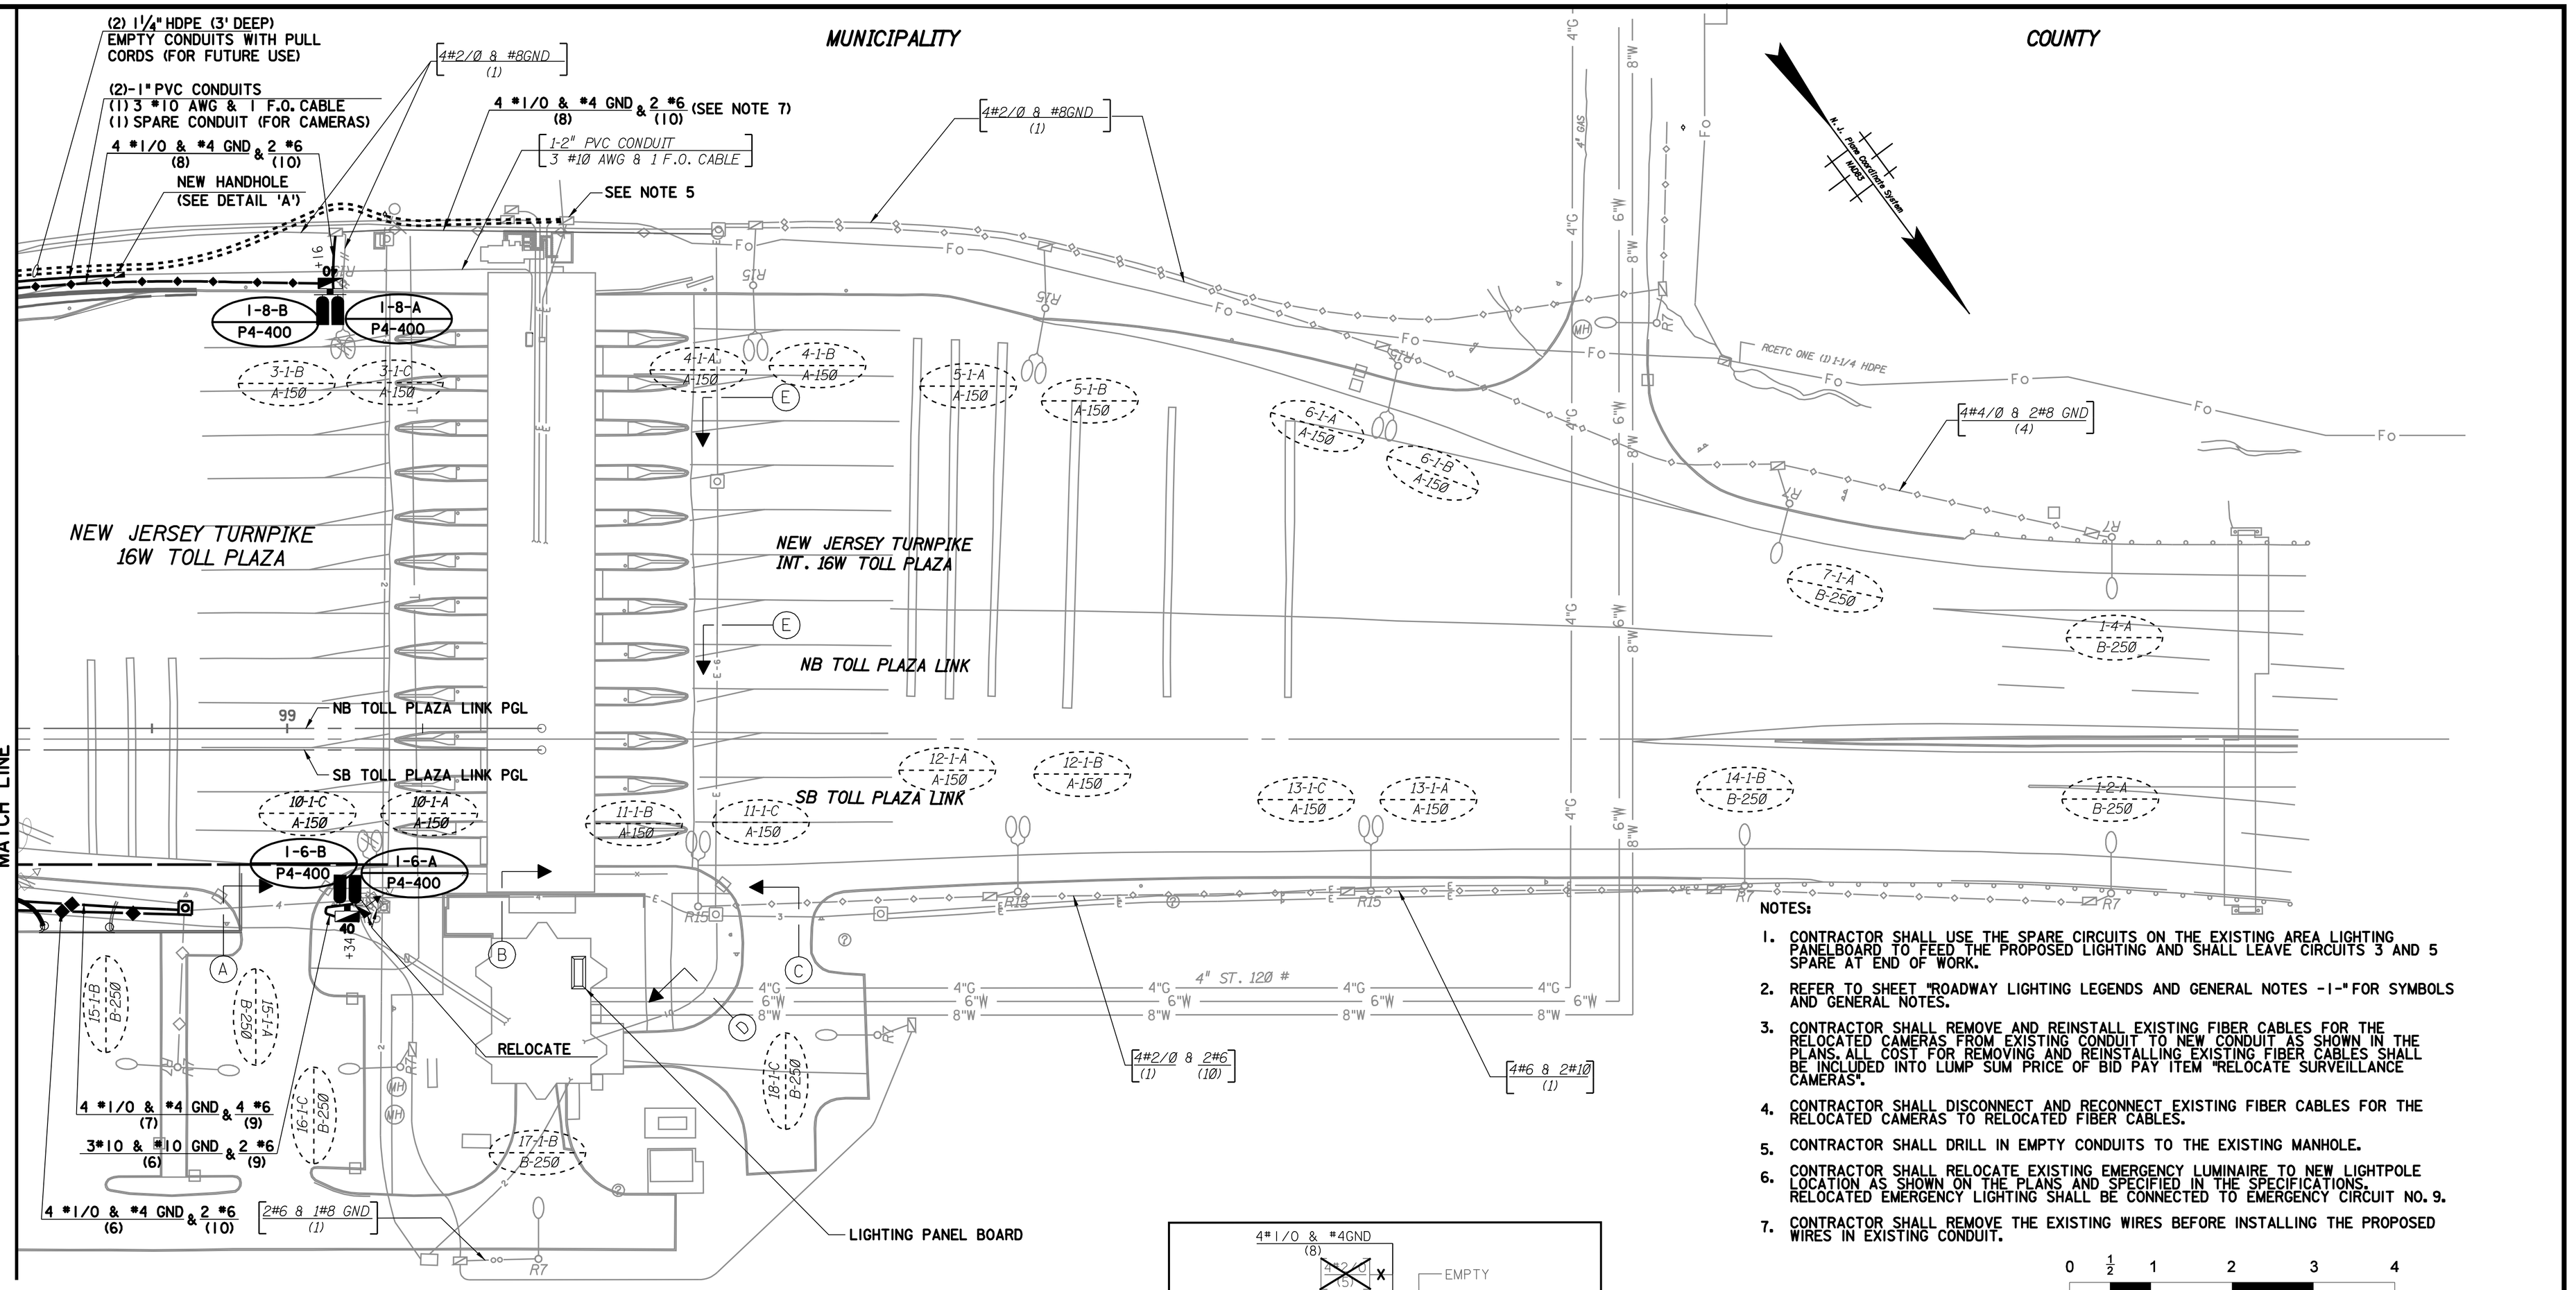

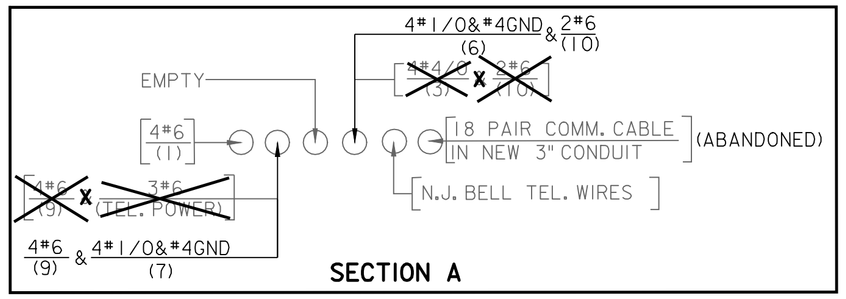

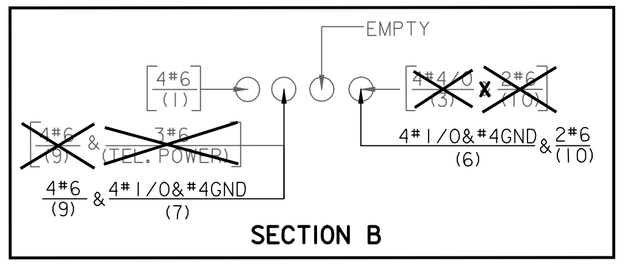

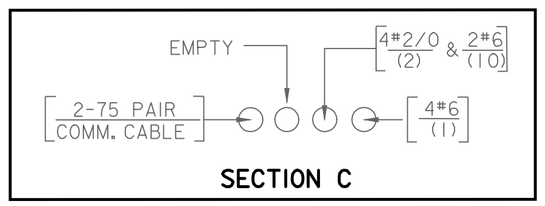

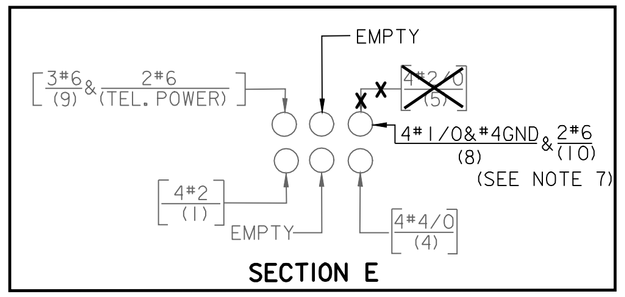

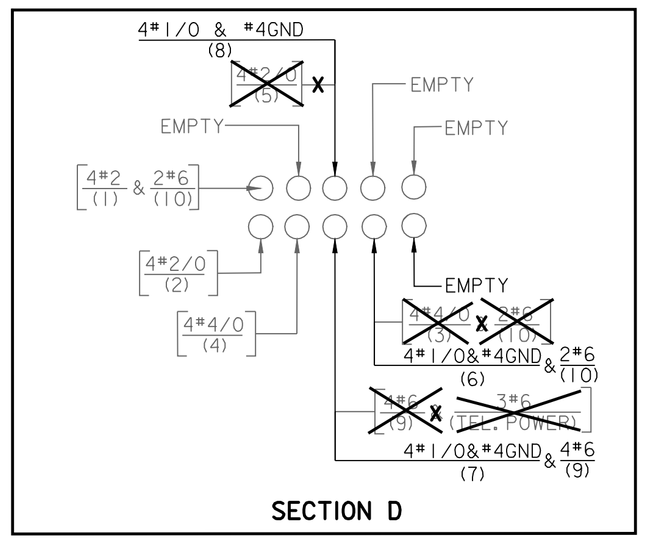

NOTES:

1. CONTRACTOR SHALL USE THE SPARE CIRCUITS ON THE EXISTING AREA LIGHTING PANELBOARD TO FEED THE PROPOSED LIGHTING AND SHALL LEAVE CIRCUITS 3 AND 5 SPARE AT END OF WORK.
2. REFER TO SHEET "ROADWAY LIGHTING LEGENDS AND GENERAL NOTES -1-" FOR SYMBOLS AND GENERAL NOTES.
3. CONTRACTOR SHALL REMOVE AND REINSTALL EXISTING FIBER CABLES FOR THE RELOCATED CAMERAS FROM EXISTING CONDUIT TO NEW CONDUIT AS SHOWN IN THE PLANS. ALL COST FOR REMOVING AND REINSTALLING EXISTING FIBER CABLES SHALL BE INCLUDED INTO LUMP SUM PRICE OF BID PAY ITEM "RELOCATE SURVEILLANCE CAMERAS".
4. CONTRACTOR SHALL DISCONNECT AND RECONNECT EXISTING FIBER CABLES FOR THE RELOCATED CAMERAS TO RELOCATED FIBER CABLES.
5. CONTRACTOR SHALL DRILL IN EMPTY CONDUITS TO THE EXISTING MANHOLE.
6. CONTRACTOR SHALL RELOCATE EXISTING EMERGENCY LUMINAIRE TO NEW LIGHTPOLE LOCATION AS SHOWN ON THE PLANS AND SPECIFIED IN THE SPECIFICATIONS. RELOCATED EMERGENCY LIGHTING SHALL BE CONNECTED TO EMERGENCY CIRCUIT NO. 9.
7. CONTRACTOR SHALL REMOVE THE EXISTING WIRES BEFORE INSTALLING THE PROPOSED WIRES IN EXISTING CONDUIT.

0 ½ 1 2 3 4

ORIGINAL SIZE IN INCHES

RL-6 / RL-8

NEW JERSEY TURNPIKE AUTHORITY

ROADWAY NAME

PROJECT DESCRIPTION

CONTRACT NO.

ROADWAY LIGHTING PLAN -4-

NAME OF CONSULTANT
ADDRESS
CERTIFICATE OF AUTHORIZATION NO. XXXXXXXXX

SCALE: 1" = 30'
DATE: MAY 2008

35
69

JOHN DOE
NEW JERSEY PROFESSIONAL ENGINEER LICENSE NO. XXXXXXXXXXX

No.	DATE	REVISION

	BY	DATE
MADE	XXX	XX-XX-XX
TRACED	XXX	XX-XX-XX
CHECKED	XXX	XX-XX-XX
SUPERVISED	X.XXXX	

No.	DATE	
0	5-08	ORIGINAL SHEET
		SAMPLE PLAN REVISION

FILE NAME: XXXX