

# New Jersey Turnpike Authority

P.O. Box 5042, Woodbridge, NJ 07095



November 05, 2018

## Document Change Announcement

### *2016 Standard Supplementary Specifications*

### *Final Cleaning Up*

*DCA2018SS-10*

#### **Subject: Revisions to**

**Section 109 Acceptance And Guaranty, Subsection 109.01 Final Cleaning Up**

#### **Description of Change:**

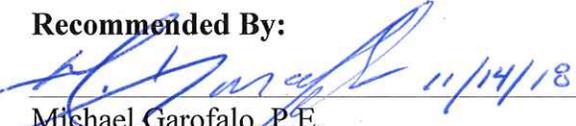
This DCA revises the Contractor's responsibility for final cleaning up as a result of new NJDEP requirements for the handling, storage, and disposal of hazardous waste.

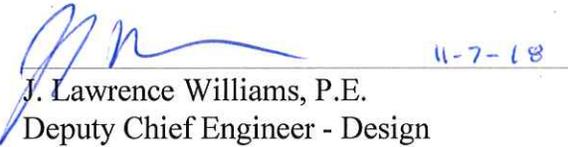
#### **Notice to New Jersey Turnpike Authority Staff and Design Consultants**

Effective immediately, all contracts currently in the design phase shall incorporate the revisions herein. For advertised contracts awaiting the opening of bids this revision shall be incorporated via addendum. Contact your New Jersey Turnpike Authority Project Manager for instruction.

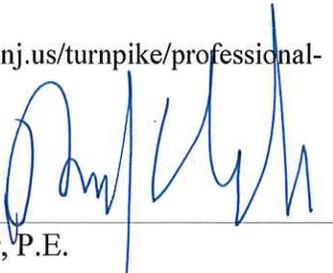
The revisions may be accessed on the Authority's webpage: <http://www.state.nj.us/turnpike/professional-services.html>

#### **Recommended By:**

 11/14/18  
Michael Garofalo, P.E.  
Deputy Chief Engineer - Construction

 11-7-18  
J. Lawrence Williams, P.E.  
Deputy Chief Engineer - Design

#### **Approved By:**

  
Robert J. Fischer, P.E.  
Chief Engineer

*Distribution: Senior Staff Engineering, Law, Maintenance and Operations Depts., UTCA, AGC, All Prequalified Consultant Firms, File*

**NOTE: All text herein is ADDED to the latest version of the 2016 Standard Supplementary Specifications.**

## **SECTION 109 – ACCEPTANCE AND GUARANTY**

---

[Include the following for all contracts:]

### **109.01 Final Cleaning Up.**

---

Delete this Subsection in its entirety and replace it with the following:

The Engineer shall be notified forty-five (45) days prior to the closing of the staging area, and the Engineer will subsequently notify the Authority's Environmental Section. Before the final acceptance of the Project, the Contractor shall remove all equipment, temporary work, hazardous materials, unused and useless materials, rubbish and temporary buildings, shall repair or replace in an acceptable manner fences or other private or public property which may have been damaged or destroyed on account of the prosecution of the work, shall fill all depressions and water pockets on public and private property caused by his operations, shall remove all obstructions from waterways caused by his work, shall clean all drains and ditches within and adjacent to the site of the project which have been obstructed by his operations, and shall leave the site of the project and adjacent public and private property in a neat and presentable condition wherever his operations have disturbed conditions existing at the time of starting work. If an above ground storage tank containing fuel was used, the Contractor shall provide soil sample testing results from the surrounding area following the removal of the tank. Payment for final cleaning up and restoration of property as above provided will not be made under any specific item, but the cost of this work shall be included in the prices bid for the various items scheduled in the Proposal.