


EXCLUSIVE TURN LANE

NOTES:

1. MINIMUM TWO SETS OF TURN ARROW PAVEMENT MARKINGS AND "ONLY" PAVEMENT WORD MARKINGS REQUIRED UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS.
2. L1 TO BE MINIMUM DISTANCE 280 FEET UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS. REFER TO CONTRACT DRAWINGS FOR DISTANCES LESS THAN 280 FEET.
3. IF L2 DISTANCE EXCEEDS 200 FEET AN ADDITIONAL ARROW PAVEMENT MARKING AND "ONLY" PAVEMENT WORD MARKING SET ARE APPLIED EQUIDISTANT TO THE FIRST AND LAST SETS ILLUSTRATED. MAXIMUM THREE SETS UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS.
4. ALIGN BOTTOM OF "ONLY" PAVEMENT WORD MARKING WITH THE START OF THE CENTER SOLID LANE LINE.

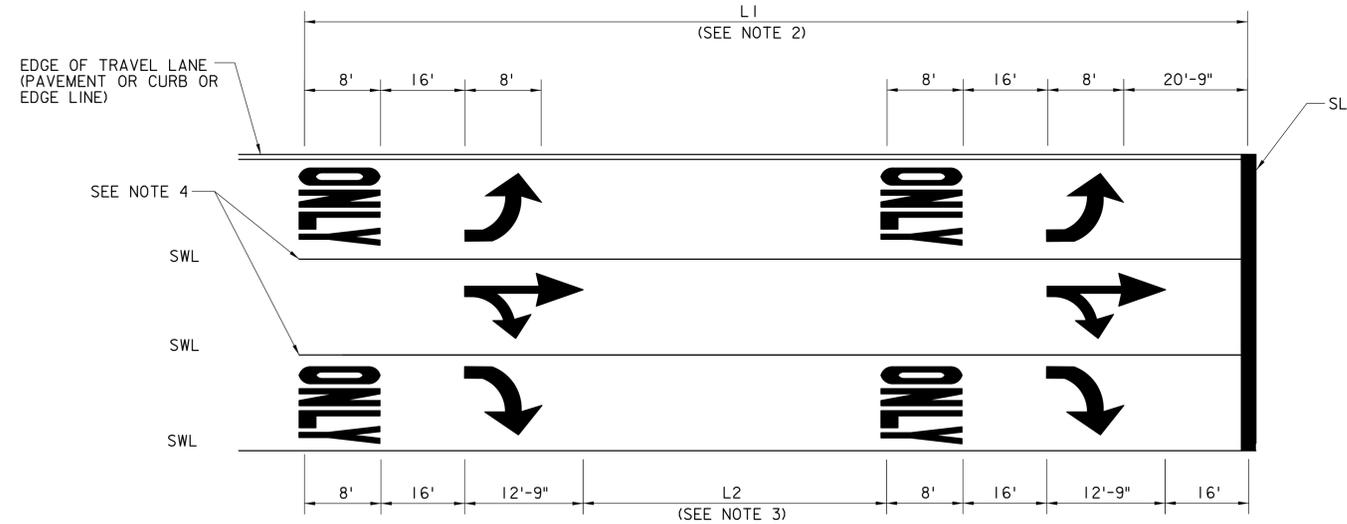


THROUGH-SHARED TURN LANE

NOTES:

1. MINIMUM TWO SETS OF TURN ARROW PAVEMENT MARKINGS AND "ONLY" PAVEMENT WORD MARKINGS REQUIRED UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS.
2. L1 TO BE MINIMUM DISTANCE 280 FEET UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS. REFER TO CONTRACT DRAWINGS FOR DISTANCES LESS THAN 280 FEET.
3. IF L2 DISTANCE EXCEEDS 300 FEET AN ADDITIONAL ARROW PAVEMENT MARKING AND "ONLY" PAVEMENT WORD MARKING SET ARE APPLIED EQUIDISTANT TO THE FIRST AND LAST SETS ILLUSTRATED. MAXIMUM THREE SETS UNLESS OTHERWISE NOTED ON CONTRACT DRAWINGS.
4. ALIGN BOTTOM OF "ONLY" PAVEMENT WORD MARKING WITH THE START OF THE CENTER SOLID LANE LINES.

NOTE:

1. SEE STANDARD DRAWING PM-1 FOR APPLICABLE GENERAL NOTES AND LEGEND.

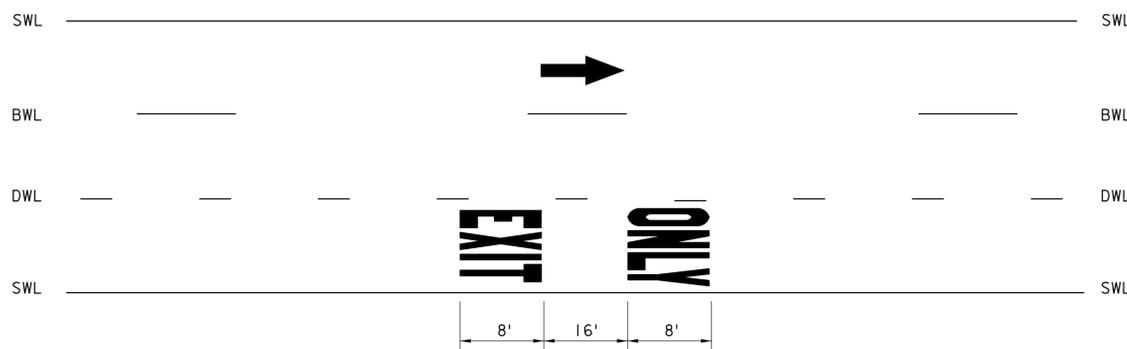

NON-CONTINUING MAINLINE LANE

NOTE:

1. SEE CONTRACT DRAWING FOR DISTANCE OF "EXIT ONLY" PAVEMENT WORD MARKING SET TO PHYSICAL ATTRIBUTE.

NEW JERSEY TURNPIKE AUTHORITY
**NEW JERSEY TURNPIKE
 GARDEN STATE PARKWAY**
 STANDARD DRAWINGS

**PAVEMENT MARKINGS FOR
 EXCLUSIVE TURN LANES**

OFFICE OF THE CHIEF ENGINEER
 NEW JERSEY TURNPIKE AUTHORITY
 WOODBRIDGE, NEW JERSEY

STANDARD DRAWING

PM-7

REV.	DESCRIPTION	DATE
0	ORIGINAL DRAWING	6-25